

SCORPION 16 PRO




IVECO




ISUZU

WORKING AREA • AREA DI LAVORO

IVECO

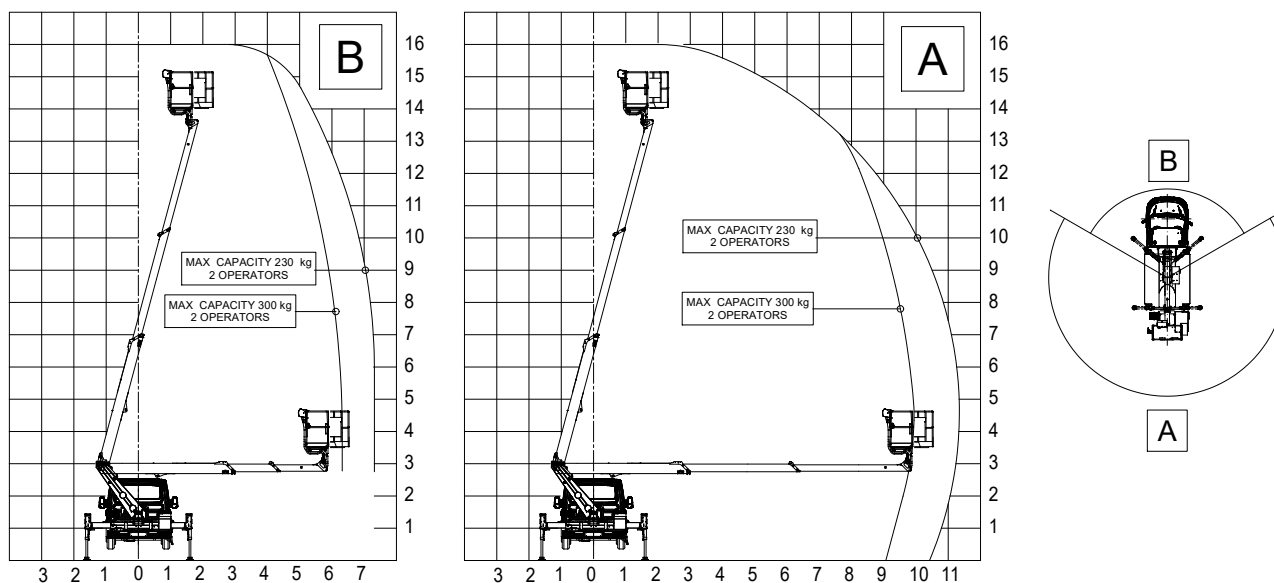


ISUZU

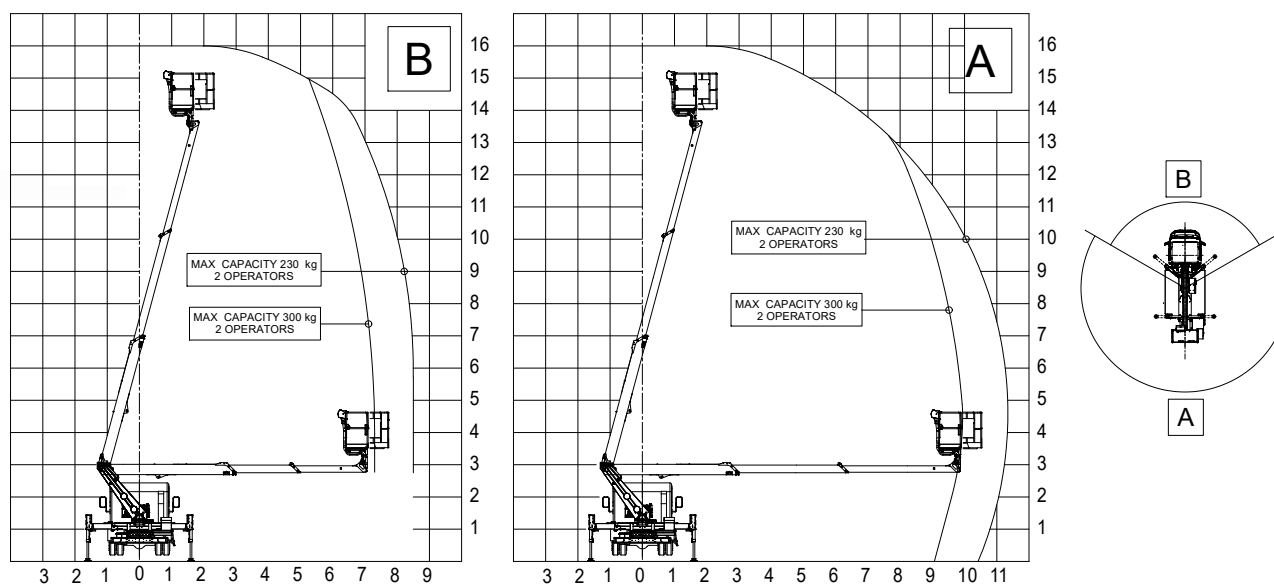


SCORPION 16 PRO

LAYOUT

IVECO

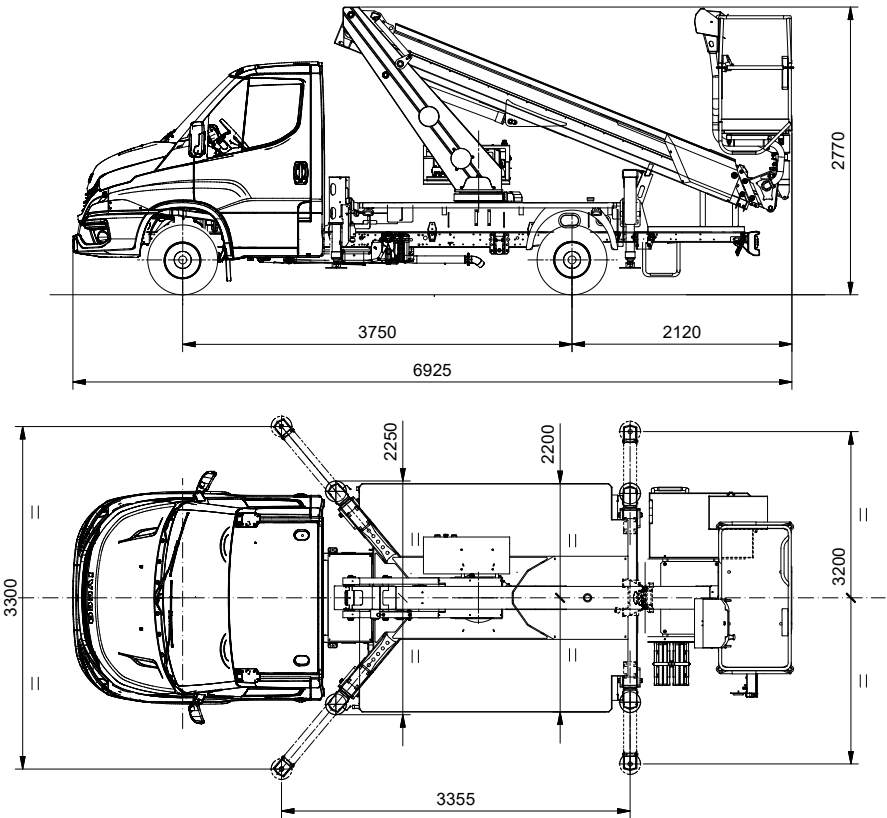

ISUZU

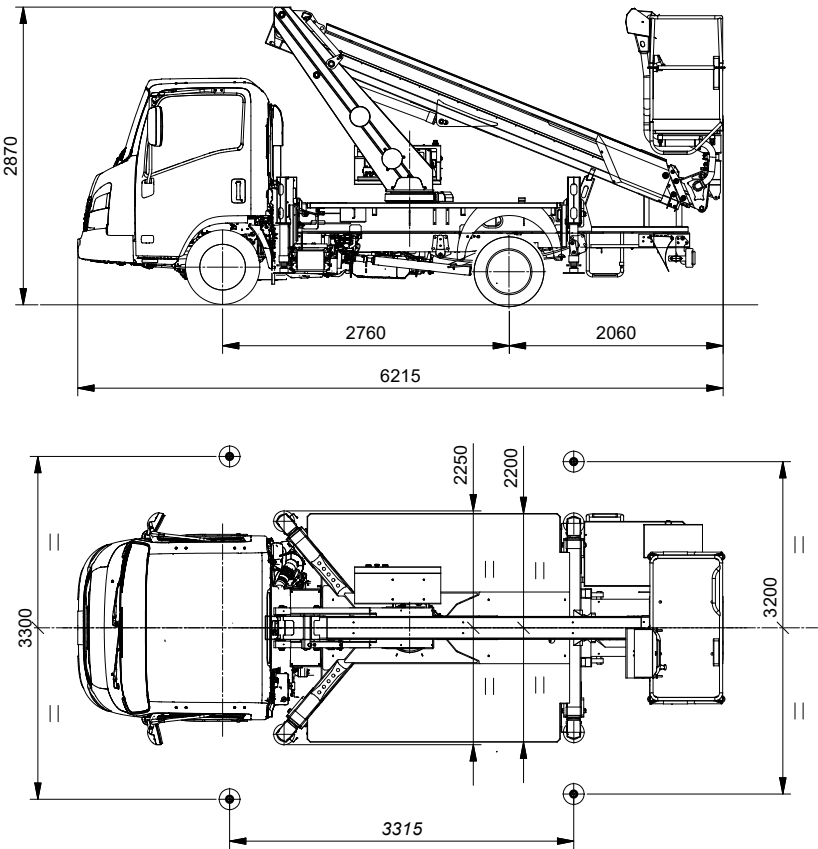

TECHNICAL SPECIFICATION

Max working height	16 m
Maximum basket floor height	14 m
Max outreach	11,3 m
Max capacity	300 kg
Platform controls	Electrohydraulic
Outriggers controls	Hydraulic (OPT Electrohydraulic)
Outriggers type	HE-HE
Basket (materials and dimensions)	Aluminium 1,4 x 1,1 x 0,7 m
Basket rotation	+/- 90°
Turret rotation	400°
Outriggers within overall width	✓
Working envelope - Variable crosspieces setup	✓
Anti-collision system between extendable structure and cab	✓
Homing Function	✓
Automatic outrigger deployment from basket	OPT
Automatic outrigger deployment from ground	OPT
Platform power supply: Hybrid (battery pack)	NA

CARATTERISTICHE TECNICHE

Altezza massima di lavoro	16 m
Altezza massima piano cestello	14 m
Sbraccio massimo di lavoro	11,3 m
Portata Massima	300 kg
Comandi Parte aerea	Elettroidraulici
Comandi stabilizzatori	Idraulici (OPT Elettroidraulici)
Tipologia stabilizzatori	HE-HE
Cesto (materiale e dimensioni)	Alluminio 1,4 x 1,1 x 0,7 m
Rotazione cestello	+/- 90°
Rotazione colonna	400°
Lavoro in sagoma	✓
Lavoro a traverse asimmetriche	✓
Anticollisione struttura estensibile - cabina	✓
Funzione Homing	✓
Stabilizzazione automatica da cesto	OPT
Stabilizzazione automatica da terra	OPT
Alimentazione piattaforma: ibrida (pacco batterie)	ND