


# SNAKE 16



ISUZU



## WORKING AREA • AREA DI LAVORO

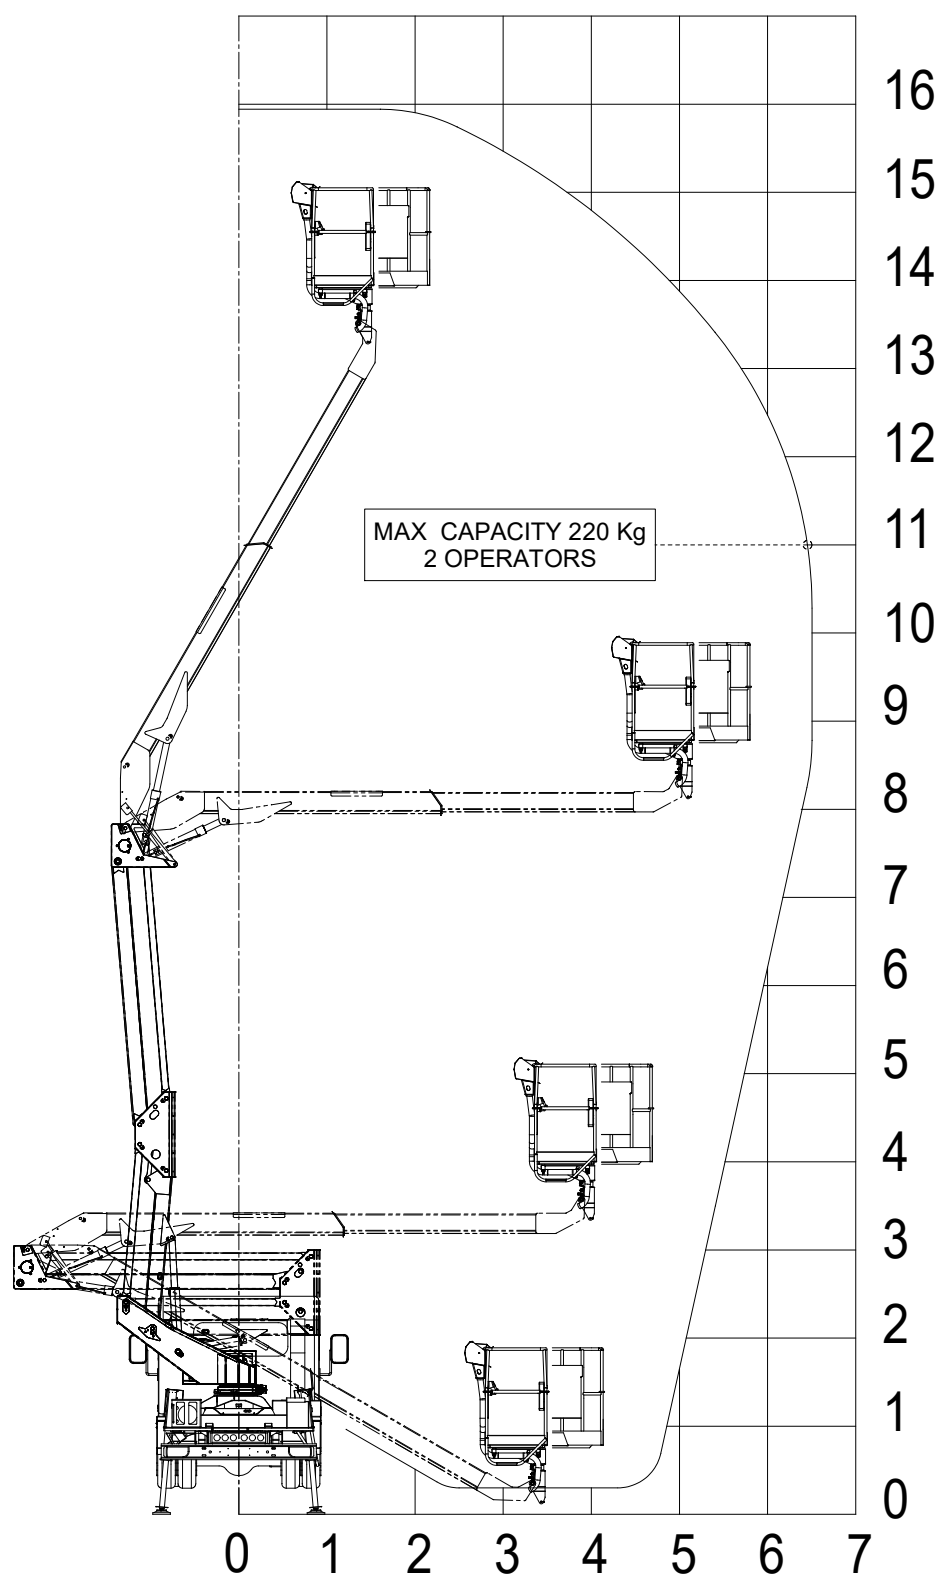

**SNAKE 16**

**LAYOUT**

**ISUZU**

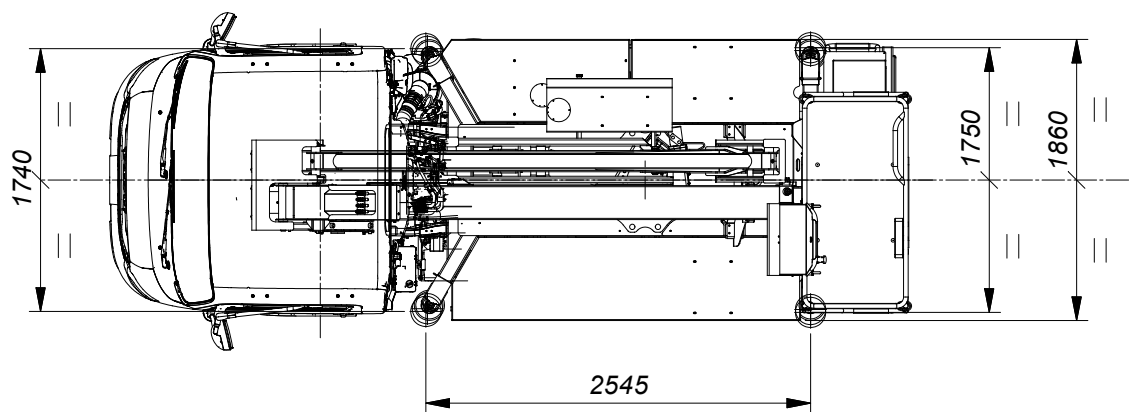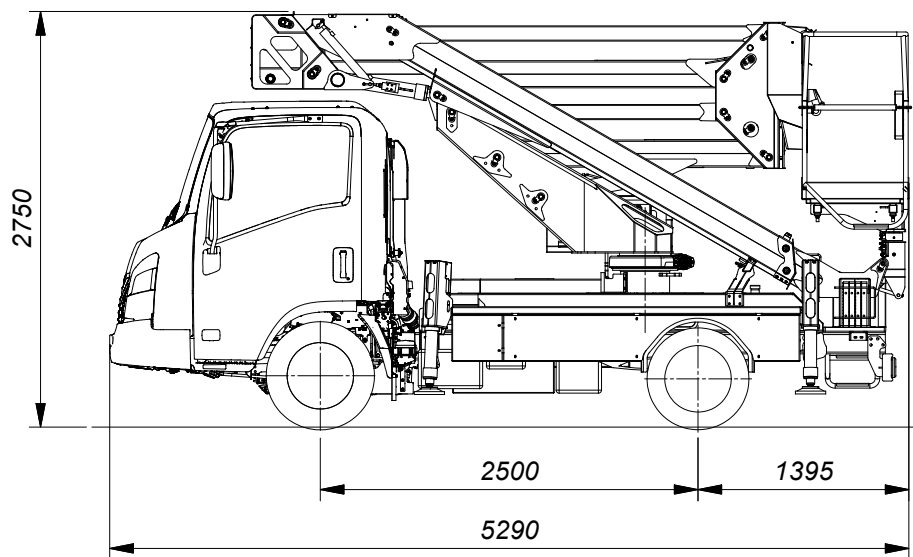

## TECHNICAL SPECIFICATION

|                                                            |                                  |
|------------------------------------------------------------|----------------------------------|
| Max working height                                         | 15,9 m                           |
| Maximum basket floor height                                | 13,9 m                           |
| Max outreach                                               | 6,5 m                            |
| Max capacity                                               | 220 kg                           |
| Platform controls                                          | Electrohydraulic                 |
| Outriggers controls                                        | Hydraulic (OPT Electrohydraulic) |
| Outriggers type                                            | H-H                              |
| Basket (materials and dimensions)                          | Aluminium 1,4 x 1,1 x 0,7 m      |
| Basket rotation                                            | +/- 90°                          |
| Turret rotation                                            | 260°                             |
| Outriggers within overall width                            | ✓                                |
| Working envelope - Variable crosspieces setup              | NA                               |
| Anti-collision system between extendable structure and cab | OPT                              |
| Homing Function                                            | OPT                              |
| Automatic outrigger deployment from basket                 | OPT                              |
| Automatic outrigger deployment from ground                 | OPT                              |
| Platform power supply: Hybrid (battery pack)               | NA                               |

## CARATTERISTICHE TECNICHE

|                                                    |                                  |
|----------------------------------------------------|----------------------------------|
| Altezza massima di lavoro                          | 15,9 m                           |
| Altezza massima piano cestello                     | 13,9 m                           |
| Sbraccio massimo di lavoro                         | 6,5 m                            |
| Portata Massima                                    | 220 kg                           |
| Comandi Parte aerea                                | Elettroidraulici                 |
| Comandi stabilizzatori                             | Idraulici (OPT Elettroidraulici) |
| Tipologia stabilizzatori                           | H-H                              |
| Cesto (materiale e dimensioni)                     | Alluminio 1,4 x 1,1 x 0,7 m      |
| Rotazione cestello                                 | +/- 90°                          |
| Rotazione colonna                                  | 260°                             |
| Lavoro in sagoma                                   | ✓                                |
| Lavoro a traverse asimmetriche                     | ND                               |
| Anticollisione struttura estensibile - cabina      | OPT                              |
| Funzione Homing                                    | OPT                              |
| Stabilizzazione automatica da cesto                | OPT                              |
| Stabilizzazione automatica da terra                | OPT                              |
| Alimentazione piattaforma: ibrida (pacco batterie) | ND                               |